

Valhall

Strengthening the Vahall Quarters Platform by injecting grout into the platform's legs




The Valhall Quarters Platform was installed in 1979. Due to regulation changes, the jacket needed upgrading to increase its strength and resistance to freak waves. To achieve this, the four legs of the jacket were injected with grout from sea level up to the cellar deck.

Aggregate-based grout was used to reduce the heat of hydration when curing, which would otherwise have been excessive due to the large volume of grout being placed.

Heat of hydration is the heat generated due to the chemical reaction which takes place when water is added to the cement. The heat causes the grout to initially expand, and then contract as it cools, which could lead to the grout cracking. Excessive heat generation is the result of very large grout volumes with high cement content.

The platform was prepared for grouting by the client. This involved installing the hose handling equipment, drilling the holes for the connectors, inspecting the legs and fitting the valves. FoundOcean then worked from a construction vessel to mix and pump the grout to the platform legs.

Grout was pumped from the bottom of the jacket leg to the top, a distance of 44.25m and volume of approximately 20m³. This was repeated for each leg. Sample cubes were taken to measure grout strength at 24 hours, three days and 28 days.

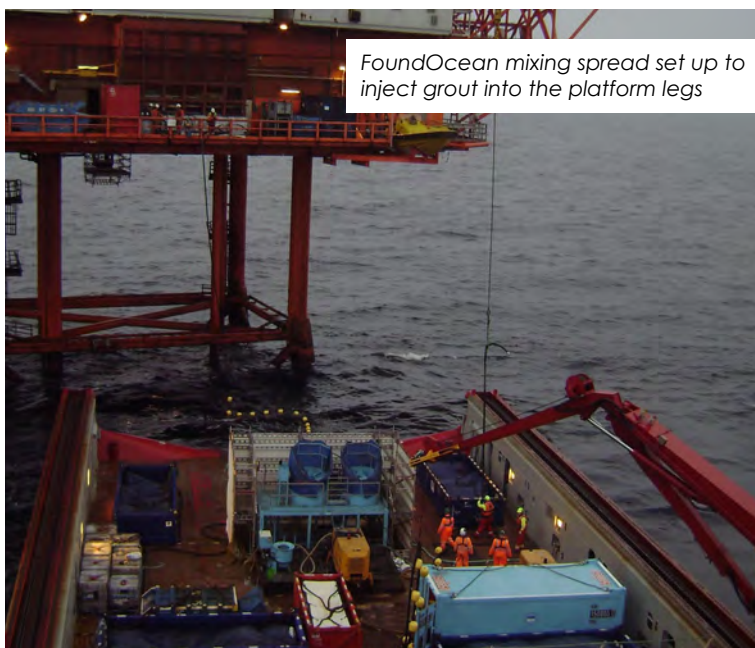

FoundOcean mixing spread set up to inject grout into the platform legs

PROJECT FACTS

Industry	Oil and Gas
Region	Central North Sea
Services	Leg member filling
Project year	2010
Operator	BP
Contractor	IK Stavanger
Water depth	74 m
Cement type	Rescon Mapei
Total cement	165 tonnes
Mixer type	Pan Mixer
Grout specification	80 MPa
Mixing rate	Up to 12m ³ /hr

TYPICAL PAN MIXER DECK PLAN

